

# Yealink CP965



## Yealink

- Android 9.0
- 5-inch multi-touch screen with 720x1280 resolution
- Optimal HD audio, full duplex technology
- Yealink Noise Proof Technology
- 20-foot (6-meter) and 360-degree voice pickup
- Built-in 12-microphone array for voice pickup
- Built-in 1-microphone array for noise cancellation
- Power over Ethernet
- 10-way conference call
- Built-in Wi-Fi (2.4GHz/5GHz, 802.11a/b/g/n)
- Pairing via Bluetooth

## TOUCH-SENSITIVE HD IP CONFERENCE PHONE

**The Yealink CP965** is designed for medium and large-sized conference rooms. Based on the Android 9.0 system, it is a flagship HD conference phone with powerful voice conferencing features and easy control operation. The CP965 adopts a business and introverted design that perfectly matches the calm style of the conference room, but also has an acoustic fabric which is impervious to any accidental liquid spills. The fingerprint-proof LCD screen with a clear UI interaction page makes it easy for anyone to control the meeting. The CP965 also has 13 built-in microphones, providing you with a clear and natural conference call experience. This conference phone provides a new intelligent voice conferencing solution, which is the ideal office assistant for any conference room.

### Modest Design, Easy-to-use User Interface

The Yealink CP965 is a hermit in the conference room. Its black acoustics fabric can detect clear audio and is resistant to water, oil, and stain. Its ultra-thin body, appropriate desktop fit, and ingenious hidden wiring slot, perfectly fit the simple business style in conference rooms. Additionally, its built-in Linux system and easy-to-use UI interface, allow users to launch a meeting with one button and increase user adoption.

### HD Audio, Smooth Communication

The CP965 adopts a Y-shaped design and has 12 built-in microphones for sound picking and 1 microphone for noise cancellation. Its 20-foot and 360° omni-direction voice pickup provides users with a clear and natural voice conference experience.

### AUDIO FEATURES

- Optimal HD audio
- Yealink Noise Proof Technology
- Smart Noise Filtering
- 20-foot (6-meter) microphone pickup range
- Apply to small to medium conference room
- Built-in 12-microphone array, 360-degree voice pickup
- Built-in 1-microphone array, decrease noise
- Loudspeaker
  - Frequency: 100-20,000 Hz
  - Volume: 94 dB at 0.5-m peak volume
- 56mm diameter and 5w speaker
- Full-duplex speakerphone with AEC
- Echo cancellation tail length is up to 320ms
- Background noise suppression
- Codecs: G.722, G.729, PCMU (G.711A), PCMA (G.711μ)
- DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO
- VAD, CNG, PLC, AJB, AGC

### PHONE FEATURES

- 1 SIP account
- Call hold, mute, DND, call recording, hotline
- 10-way conference call
- Analog PSTN calls via CPN10
- Redial, call waiting, emergency call
- Call forward, call transfer, call return, dial plan
- Ring tone selection/import/delete
- Set date time manually or automatically
- Volume adjustment
- Pairing via Bluetooth
- Active Speaker

### STAR CONNECTION

- Up to four CP965: One primary CP, three secondary CP
- Wired network only

### DIRECTOR

- Local phonebook up to 1000 entries
- XML/LDAP remote phonebook
- Intelligent search method
- Phonebook search/import/export

- Call history: dialed/received/missed/forwarded
- Block list

### IP-PBX FEATURES

- Busy Lamp Field (BLF)
- Multicast paging
- Intercom
- Anonymous call
- Anonymous call rejection
- Voice mail
- Distinctive ringtone
- Call pickups

### DISPLAY

- 5" 720x1280 capacitive touch screen
- Volume key
- Home button

### INTERFACE

- 1 x RJ45 10/100M Ethernet port
- Built-in Wi-Fi (2.4GHz/5GHz, 802.11a/b/g/n)
- Built-in Bluetooth 4.2
- Power over Ethernet (IEEE 802.3at), class 4
- 1 x USB 2.0 Type-A device port
- 1 x USB 2.0 Type-C device port
- 1 x Security slot

### NETWORK AND SECURITY

- SIP v1 (RFC2543), v2 (RFC3261)
- SIP server redundancy supported
- IPv4/IPv6
- NAT traversal: STUN mode
- Proxy mode and peer-to-peer SIP link mode
- IP assignment: static/DHCP
- HTTP/HTTPS web server
- Time and date synchronization using SNTP
- UDP/TCP/DNS-SRV (RFC 3263)
- QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS, DSCP
- SRTP for voice encryption
- Transport Layer Security (TLS1.3)
- HTTPS certificate manager
- AES encryption for configuration file (AES256)
- Adb encryption authenticated

- Digest authentication using MD5/MD5-sess
- OpenVPN, L2TP VPN
- WPA2/WPA3
- Secure boot
- GARP (Generic Attribute Registration Protocol)

### MANAGEMENT

- Configuration: browser/phone/auto-provision
- Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- Auto-provision with PnP
- Zero-sp-touch, TR-069
- Reset to factory, reboot
- Package tracing export, system log


### OTHER PHYSICAL FEATURES

- Color: Black
- External Yealink PoE adapter (Optional)
- Power consumption (PSU): 5.9W-14W
- Power consumption (PoE): 7.3W-20W
- Dimension (W\*D\*H): 328mm\*322mm\*62mm
- Operating humidity: 10~90%
- Storage temperature: -10~40°C (+14~104°F)

### PACKAGE FEATURES

- Package content:
  - Yealink CP965 IP conference phone
  - Ethernet Cable (7.5m CAT5E UTP cable)
  - M2x5 screw
  - Screwdriver
  - Wireless Microphone CPW25 (Optional)/CPW65 (Optional)
  - Quick Start Guide
  - Yealink PoE Adapter YLPOE30 (Optional)
- Qty/CTN: 5 PCS
- N.W/CTN: 7.964 kg
- G.W/CTN: 9.02 kg
- Giftbox size: 398mm\*384mm\*105mm
- Carton Meas: 552mm\*392mm\*410mm

### PACKAGE FEATURES

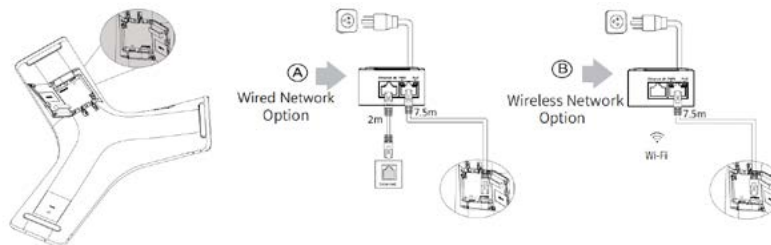

Intermedia has been recognized by J.D. Power for providing "An Outstanding Customer Service Experience" for its Assisted Technical Support. J.D. Power 2021 Certified Assisted Technical Program, developed in conjunction with TSIA. Based on successful completion of an audit and exceeding a customer satisfaction benchmark for assisted support operations. For more information, visit [www.jdpower.com](http://www.jdpower.com) or [www.tsia.com](http://www.tsia.com).

Questions? Contact Us Today.